

# SINGLE V3 PUMP STATION

The Single V3 is a packaged pump station designed to collect ground water via perimeter channel modular drainage system.

- Specifically designed for below ground applications.
- A typical application would be collecting ground water from non-habitable area such as vaulted storage. This product is not recommended for habitable spaces.
- The chamber is manufactured from HDPE and able to withstand hydrostatic forces encountered in applications with high water tables
- Delivered as a complete package including, chamber, all internal pipework and powerful V3 pump
- Designed to be installed by contractors with competent building, plumbing and electrical skills

This pump station cannot collect grey water from showers and wash hand basins, or foul water from a WC. For this you would require a Foul V3 pump station.

## Installation

The chamber sits on a concrete base, inlets in the form of perimeter channel or modular 110mm system are connected into the chamber, a 32mm discharge pipe connects to the gravity drain and a 50mm cable duct to bring electrics and control cabling from the chamber into a dry environment. The chamber is filled with water to prevent buoyancy and is surrounded with concrete. A simple rule of thumb is the top of the chamber should be level with the structural slab or no deeper than 500mm from the final finishes.

The installation should be completed with a double sealed cover supplied by the contractor to tie in with the general floor finish. Remember this product needs to be accessed for service so care should be taken with the location.

For full installation instructions see 'Single V3 Installation Instructions' on our website.

## RECOMMENDATIONS

- AlertMaxx2 (code TBC).
- PowerMaxx2 (code PMX2).
- Hi-PowerMaxx2 (code HiPMX2).

## SPECIFICATION

- NBS specification R18 (clause 310) Pumping Stations & Pressure Pipelines.
- B" 8102:2022 Type C Drainage Protection.





## PUMP STATION TECHNICAL DATA

Product Code	S V3
Chamber Material	High Density Polyethylene
Volume Below Inlets	43L
Total Volume	80L
Fixed Inlets	3 x 110 / 160mm
Cable Duct Size	50mm
Discharge Connection	1.25" / 32mm BSP Class C
Discharge Pipework	1.25" / 32mm BSP Class C
Internal Pipework	1.25" / 32mm BSP Class C
Cable Duct Pipework	2" / 50mm White Waste Pipe

# SINGLE V3 PUMP STATION

## DIMENSIONS

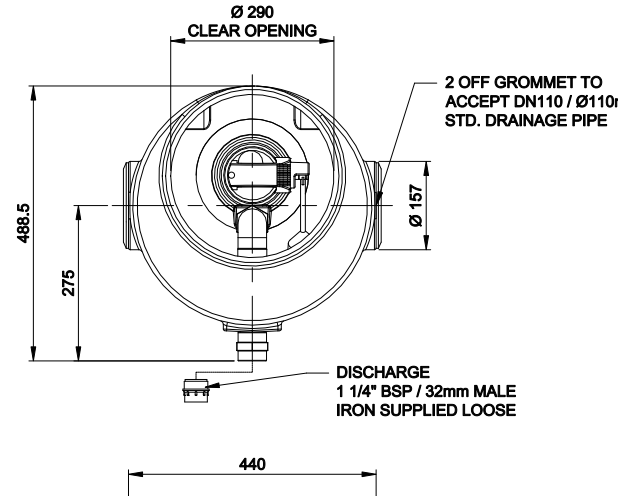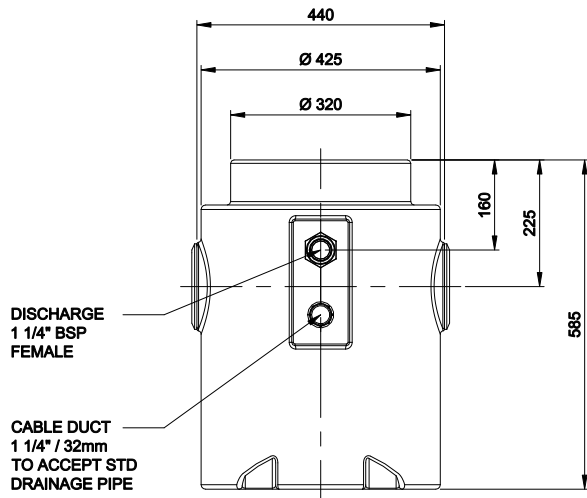

## PUMP DATA

Pump Model	V3
Voltage	230V
KW Rating P1 / P2	0.43 / 0.18kW
Full Load Current	1.9A
Fuse Spur Rating	13A Non-switched
Typical Duty	2.0l/s @ 3.5m
Power Phase	Single
Weight	5.64kg

